

Lever Lock Handle Butterfly Valve Grooved 300 PSI




Technical Features

- Connections: Grooved Ends (AWWA C606)
- Size: 2", 2-1/2", 3", 4", 5", 6", 8", 10", 12", 14"
- Maximum Working Pressure: 300PSI (Max. Test Pressure: 450PSI)
- Maximum Working Temperature: 250°F (120°C)
- Application: Indoor and Outdoor Use
- 10 Point Lock Position



| Components | Material |
|------------------|--|
| Body | Nylon-11 Coated |
| Disc | Ductile Iron, EPDM or NBR Encapsulated |
| Stem | Stainless Steel |
| Throttling Plate | Steel, Zinc Plated |
| ISO Mounting Pad | |
| Handle | Carbon Steel, Epoxy Coating or Casting |

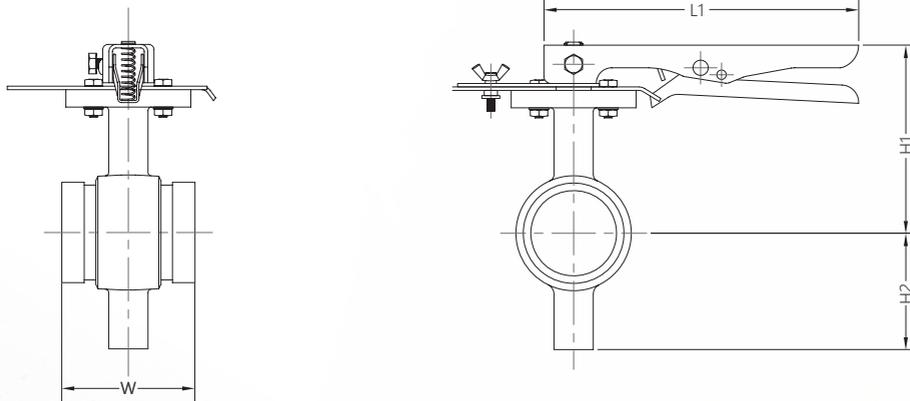

Dimensions

| Size | L1 | | W | | H1 | | H2 | | Weight lbs |
|--------|------|--------|------|--------|-------|--------|------|--------|---------------|
| | in | mm | in | mm | in | mm | in | mm | |
| 2" | 9.0 | 228.6 | 3.4 | 86 | 4.8 | 121 | 2.6 | 65 | - |
| 2-1/2" | 9.0 | 228.6 | 3.8 | 96.3 | 5.4 | 136.9 | 3.3 | 84.8 | 8.5 |
| 3" | 9.0 | 228.6 | 3.8 | 96.3 | 5.7 | 143.8 | 3.6 | 91.9 | 10.0 |
| 4" | 9.0 | 228.6 | 4.5 | 115.3 | 7.0 | 176.8 | 4.2 | 107.9 | 13.5 |
| 5" | 11.3 | 287.02 | 5.2 | 132.3 | 7.8 | 198.12 | 5.2 | 132.08 | N/A |
| 6" | 11.3 | 287.02 | 5.2 | 132.3 | 8.2 | 210.8 | 5.7 | 144.8 | 20.0 |
| 8" | 13.3 | 337.82 | 5.8 | 147.32 | 9.3 | 235.97 | 6.7 | 169.93 | 33.51 |
| 10" | 13.3 | 337.82 | 6.26 | 159 | 8.50 | 216 | 7.72 | 196 | N/A |
| 12" | 13.3 | 337.82 | 6.50 | 165 | 10 | 254 | 8.90 | 226 | N/A |
| 14" | 13.3 | 337.82 | 7.01 | 178 | 11.42 | 290 | 9.49 | 241 | N/A |

* 10", 12", 14" : Special Order